



LED 34W 4000K 4' Strip

Item # 805

L34ST4DIM/40K

1 FIXTURE SPECIFICATION

| | | |
|-----|--------------------------------|--------------------------|
| 1-1 | Fixture Type | LED Strip |
| 1-2 | Dimmable (Y/N) | YES (0-10V) |
| 1-3 | Fixture Finish/Type | White Painted Steel Body |
| 1-4 | Fixture Wattage | 34W |
| 1-5 | Rated Average Life (hours) L70 | 50,000 |
| 1-6 | LED Type | SMD |
| 1-7 | Reliable Operating Temperature | -4F to 113F |





2 Photometric Characteristics

| | | |
|-----|-----------------------------|-------|
| 2-1 | Initial Lumens | 3840 |
| 2-2 | Initial Lumens per Watt | 113 |
| 2-3 | Color Temperature | 4000K |
| 2-4 | Color Rendering Index (CRI) | 80 |

3 Electrical Characteristics

| | | | | | |
|-----|------------------------------|--------------------|-----|--------------|----------------|
| 3-1 | Input Line Voltage/Frequency | 120V - 277V, 60 Hz | 3-4 | Power Factor | >0.9 |
| 3-2 | Lamp rated Wattage | 34W | 3-5 | Dimming Type | (0-10V)10-100% |
| 3-3 | Total Harmonic Distortion | <20% | | | |

4 Dimensional Characteristics

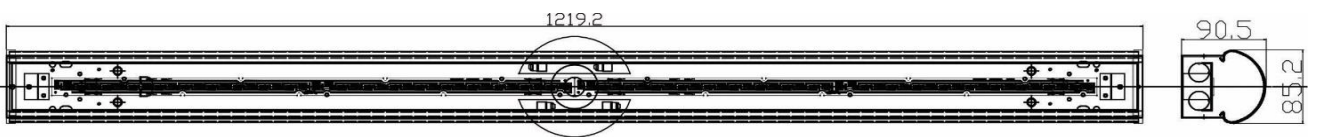

L X B X H (mm) 1219.2 x 85.2 x 90.5

5 Product Information

| | | |
|-----|---------------------|--|
| 5-1 | Primary Application | Industrial/Commercial/Retail/Residential Application |
| 5-2 | Limited Warranty | 5 Years from date of purchase |
| 5-3 | Certified | UL/LM79 |
| 5-4 | RoHS Compliant | Yes |
| 5-5 | Environment | Suitable for Damp Location/Indoor Use |

6 Packing Details

| | | | | | |
|-----|---------------|------------------|-----|-------------------|-----|
| 6-1 | Box size (mm) | 1260 x 297 x 212 | 6-3 | Net Weight (Kg) | TBA |
| 6-2 | Qty /Box | 6 pcs | 6-4 | Gross Weight (Kg) | TBA |